




IP Pro 3


# 4-Channel 1080P Wi-Fi Kit

# haper

CCTV & SECURITY SPECIALIST



Installation and operation



Wire-free camera features



Remote viewing and mobile support



WIFI

Free from complex wires



HD 1080P

1080P HD Video  
HDMI or VGA HD output



Remote Access

Get real-time video via mobile



Day/Night

True 24hours/7days Monitoring



Motion Detection

Never miss any important thing with alert notification



Weatherproof

Professional IP66 weatherproof for indoor/outdoor

## Installation Steps




Connecting Power >



Connecting Power >



Connecting Router >

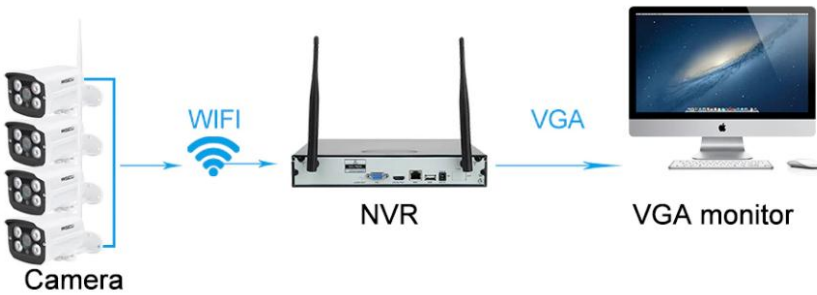

IR-CUT



IR-CUT

AUTO WHITE BALANCE

100WPX



1.0 Mega-Pixel

NIGHT VISION 20-30M



WHAT'S INCLUDED

# haper

CCTV & SECURITY SPECIALIST



NVR\*1



HD Camera\*4



Mouse



Network Cable



NVR Adaptor\*1



Camera Adaptor\*4

**Wireless NVR**

<b>Model</b>	<b>WFK-J2004</b>	
<b>video audio input</b>	network video input	4 channel
	HDMI output	1channel, resolution: 1024x768, 1280x1024,1366x768, 1440x900,1920x1080p
<b>video output</b>	VGA output	1channel, resolution: 1024x768, 1280x1024,1366x768, 1440x900,1920x1080p
<b>video compression</b>	standard H.265, H.264, H265+	
<b>video encoding specification</b>	recording resolution	1920 x 1080
	playback	4 channel
<b>video manage</b>	recording/capture mode	manual recording、time recording、motion detection recording、alarm recording
	playback mode	instant playback、general playback、event playback
	backup mode	general backup
<b>HDD drive</b>	type	1 SATA connector
	max capacity	every sata MAX 6TB
<b>eternal connector</b>	network port	one RJ45 10M/100M self-adaptive Ethernet port 2 antenna
	USB port	1 USB 2.0
	audio port	1, 3.5 inch headphone jack (optional)
<b>network management</b>	network protocol	IEEE 802.11Wi-Fi、UPnP (plug and play)、SMTP (email service)、PPPoE (dial up networking)、DHCP etc.
<b>Others</b>	power supply	DC 12V 2A

**Wireless IPC**

<b>Model</b>	<b>WFK-J2004</b>	
<b>processor</b>	professional industrial processor	
<b>operation system</b>	embed Linux operation system	
<b>image sensor</b>	1/3" Progressive Scan Sensor	
<b>S/N Ratio</b>	> 39.1 dB	
<b>video compression</b>	standard H.265, H.264, H265+	
<b>resolution</b>	1920 x 1080 16:9	
<b>Min illumination</b>	Color: 0.1 Lux	
	B/W: 0.01 Lux	
<b>lens</b>	4mm	
<b>OSD</b>	Date Time & Title	
<b>white balance</b>	Auto	
<b>Day &amp; Night</b>	Auto / Color / BW	
<b>3D-DNR</b>	Auto	
<b>Mirror/Flip</b>	On / Off	
<b>stream</b>	dual stream: 1920x1080@15fps、640x480@15fps	
<b>working humidity/temperature</b>	-10°C to +50°C / 30% to 80% RH	
<b>storage temperature / humidity</b>	-20°C to +60°C / 20% to 90% RH	