

Features

- H.265 Video Compression Encoding
- AI Functions: PID, LCD, SOD, PD, FD, CC
- 4/8 built in PoE (Power over Ethernet) ports
- Up to 8MP Resolution for Preview and Playback
- Instant mobile alerts of intruders and cloud backup
- Click-and-drag digital zoom in live view and playback
- Full channel synchronous playback on device and mobile
- Pentaplex Operation – view, record, playback, back up & remotely control the system simultaneously
- Professional Series with Advanced AI Functions
- Supports up to 6TB Hard Disk
- USB 3.0

Technical Specification

Video/Audio	
Incoming Bandwidth	4CH: 50Mbps
	8CH: 80Mbps
Two-way Audio	1-CH RCA
Interface	1 HDMI, 1 VGA
Resolution	3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768
Multi-Screen Display	4CH: 1/4
	8CH: 1/4/6/8/9

Recording	
Compression	H.265/H.264
Backup Method	USB, Cloud Backup, FTP, Mobile Phone, PC
Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	4CH: 4 Channels
	8CH: 8 Channels

AI Functions (Must pair with AI Camera)	
PID	Perimeter Intrusion Detection
LCD	Line Crossing Detection
SOD	Stationary Object Detection
PD	Pedestrian Detection
FD	Face Detection
CC	Cross Counting

Network	
Interface	1 RJ-45 Port (10/100Mbps)
PoE	4CH: 4 ports (IEEE802.3at/af)
	8CH: 8 ports (IEEE802.3at/af)
Smart Phone	IOS, Android
Interoperability	ONVIF 2.4

External Interface	
Network Interface	1 RJ-45 Port (10/100Mbps)
USB Interface	2 USB Ports (2 USB2.0)


Storage	
Internal HDD	1 SATA HDD
Capacity	Up to 6TB

Electrical	
Power Supply	DC12V
Power Consumption (Without HDD)	4CH: 4W
	8CH: 5W


Construction	
Dimensions	300mm×227mm×53mm
Weight	1.2kg (Without HDD)

Dimensions

CN8-4P

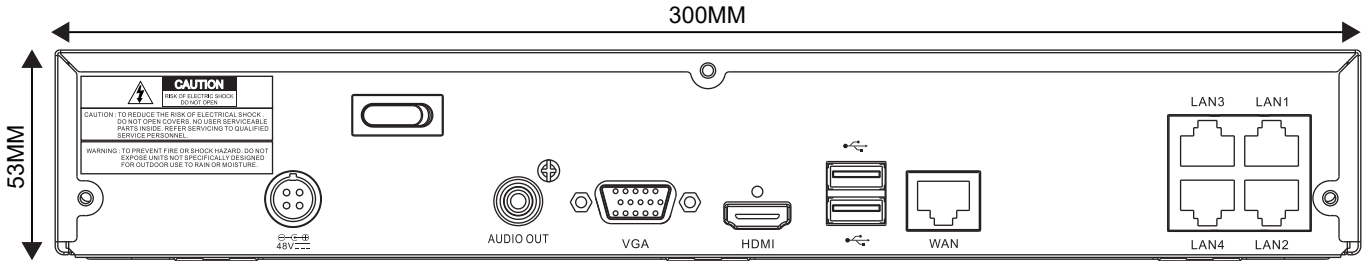

CN8-8P

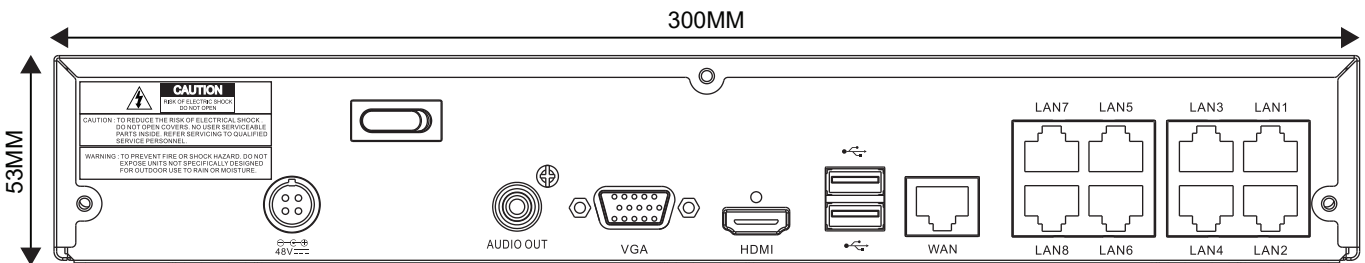

Represented by:

Celtech Security Sdn Bhd

No 41, Jalan SP 2/1, Serdang Perdana,
Seri Kembangan, 43000 Selangor.

Email: thomas@celtech.com.my

*Product specifications and availability are subject to change without notice.